

## Generator set data sheet



**Model:** C33 D5 (X-Series)  
**Frequency:** 50  
**Fuel type:** Diesel

<b>Spec sheet:</b>	<b>SS23-CPGK</b>
<b>Noise data sheet (open/enclosed):</b>	<b>ND50-OS550/ND50-CS550</b>
<b>Airflow data sheet:</b>	<b>AF50-550</b>
<b>Derate data sheet (open/enclosed):</b>	<b>DD50-OS550/DD50-CS550</b>
<b>Transient data sheet:</b>	<b>TD50-550</b>

Fuel consumption	Standby kVA (kW)				Prime kVA (kW)			
	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
<b>Ratings</b>	33 (26.4)				30 (24)			
<b>Load</b>	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
<b>gph</b>	0.8	1.2	1.6	2.3	0.8	1.1	1.5	2.0
<b>L/hr</b>	3	4.4	6.1	8.7	2.9	4.1	5.6	7.6

Engine	Standby Rating	Prime Rating
Engine manufacturer	Cummins	
Engine model	X 3.3 G1	
Configuration	4 cycle, in-line, 4 cylinder diesel	
Aspiration	Naturally aspirated	
Gross engine power output, kWm	36	32
BMEP at set rated load, kPa	863.9	767.9
Bore, mm	91.4	
Stroke, mm	127	
Rated speed, rpm	1500	
Piston speed, m/s	6.35	
Compression ratio	18.5:2	
Lube oil capacity, L	6.8	
Overspeed limit, rpm	1725	
Regenerative power, kW	2.4	
Governor type	Mechanical	
Starting voltage	12 Volts DC	

Fuel flow	
Maximum fuel flow, L/hr	40
Maximum fuel inlet restriction, mm Hg	73.66
Maximum fuel inlet temperature, °C	60

<b>Air</b>	<b>Standby Rating</b>	<b>Prime Rating</b>
Combustion air, m <sup>3</sup> /min	2.06	2.06
Maximum air cleaner restriction, kPa	2.5	

## Exhaust

Exhaust gas flow at set rated load, m <sup>3</sup> /min	2.29	2.29
Exhaust gas temperature, °C	600	550
Maximum exhaust back pressure, kPa	4.75	

## Standard set-mounted radiator cooling

Ambient design, °C	50	
Fan load, kW <sub>m</sub>	1.2	
Coolant capacity (with radiator), L	26	
Cooling system air flow, m <sup>3</sup> /sec @ 12.7 mmH <sub>2</sub> O	106	
Total heat rejection, Btu/min	1653	1539
Maximum cooling air flow static restriction mm H <sub>2</sub> O	TBC	

## Weights\*

	<b>Open</b>	<b>Enclosed</b>
Unit dry weight kgs	685	1044
Unit wet weight kgs	860	1219


\* Weights represent a set with standard features. See outline drawing for weights of other configurations.

## Dimensions


	<b>Length</b>	<b>Width</b>	<b>Height</b>
Standard open set dimensions mm	1753	930	1238
Enclosed set standard dimensions mm	2253	969	1616

## Genset outline

### Open set

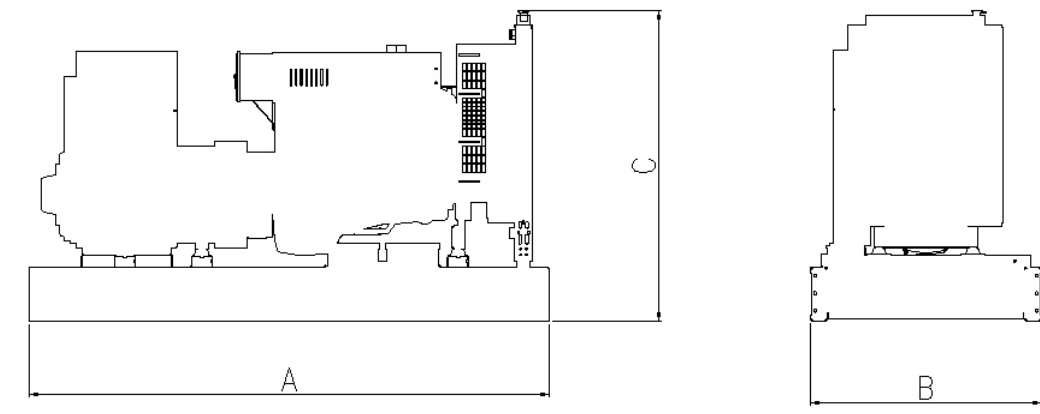

### Enclosed set

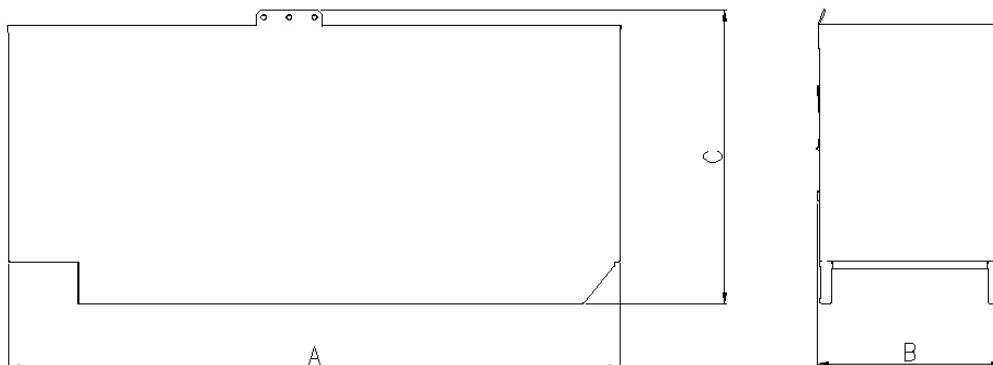

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

## Alternator data

Connection	Temp rise °C	Duty	Alternator	Voltage
Wye, 3-phase	163/125	S/P	PI144G	380-416V
Wye, 3-phase	125/105	S/P	PI144H	380-440
Wye, 1-phase	163/125	S/P	PI144H	220-240

## Ratings definitions

Emergency standby power (ESP):	Limited-time running power (LTP):	Prime power (PRP):	Base load (continuous) power (COP):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789 and DIN 6271.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789 and DIN 6271.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) is in accordance with ISO 8528, ISO 3046, AS 2789 and DIN 6271.

## Formulas for calculating full load currents:

### Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

### Single phase output

$$\frac{\text{kW} \times \text{SinglePhaseFactor} \times 1000}{\text{Voltage}}$$

### See your distributor for more information.

Cummins Power Generation  
 Manston Park, Columbus Avenue  
 Manston, Ramsgate  
 Kent CT12 5BF, UK  
 Telephone: +44 (0) 1843 255000  
 Fax +44 (0) 1843 255902  
 E-mail: [cpg.uk@cummins.com](mailto:cpg.uk@cummins.com)  
 Web: [www.cumminspower.com](http://www.cumminspower.com)

